


## Welded Master Link Assembly X-0081

---

### Product information

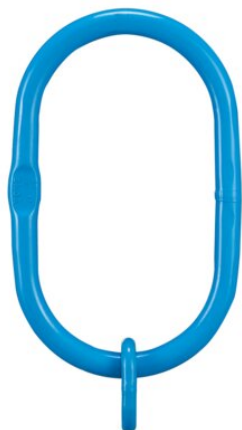

Welded Master Link designed for 1 leg chain, wire rope and webbing slings.  
At least 25% greater WLL than traditional Grade 8 products.  
Fatigue rated to 20,000 cycles at 1.5 times the WLL.  
Proof Load tested at 2.5 times the WLL with certification for each batch manufactured.

[... Read more](#)


---

**Material:** Quenched and Tempered Alloy Steel  
**Marking:** According to standard, CE-marked, Type, manufacturer ID, traceability.  
**Temperature range:** -40° up to +200°C (without reduction in WLL).  
**Finish:** Blue Painted  
**Standard:** EN 1677-4

**Safety factor:** 4:1  
**Grade:** 10

## Welded Master Link Assembly X-0081

### Blueprint



### Lifting table

Part code	Code	Chain diameter	WLL ton	EWL mm	Proof Load kN	Used to single hook acc. to DIN 15401 No.	A mm	B mm	D mm	a mm	b mm	d mm	Weight kg
402100250490	ED-28	6-8	2.5	340	61	25	340	180	22	54	25	13	3.2
402100400490	ED-22	10	4	340	98	25	340	180	28	70	34	16	5.4