
Welded Master Link Assembly X-0081

Product information

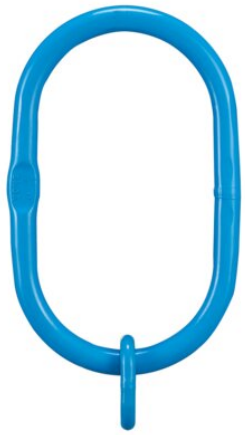

Welded Master Link designed for 1 leg chain, wire rope and webbing slings.
At least 25% greater WLL than traditional Grade 8 products.
Fatigue rated to 20,000 cycles at 1.5 times the WLL.
Proof Load tested at 2.5 times the WLL with certification for each batch manufactured.

... *Read more*

Material: Quenched and Tempered Alloy Steel
Marking: According to standard, CE-mark, Type, manufacturer ID, traceability.
Temperature range: -40° up to +200°C (without reduction in WLL).
Finish: Blue Painted
Standard: EN 1677-4


Safety factor: 4:1
Grade: 10

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

Welded Master Link Assembly X-0081

Blueprint



Lifting table

Part code	Code	Chain diameter mm	WLL ton	EWL mm	Proof Load kN	Used to single hook acc. to DIN 15401 No.	A mm	B mm	D mm	a mm	b mm	d mm	Weight kg
402100250490	ED-28	6-8	2.5	340	61	25	340	180	22	54	25	13	3.2
402100400490	ED-22	10	4	340	98	25	340	180	28	70	34	16	5.4

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved