


Steel Wire Rope Polyamide/Nylon-coated 6x7-WSC

Product information

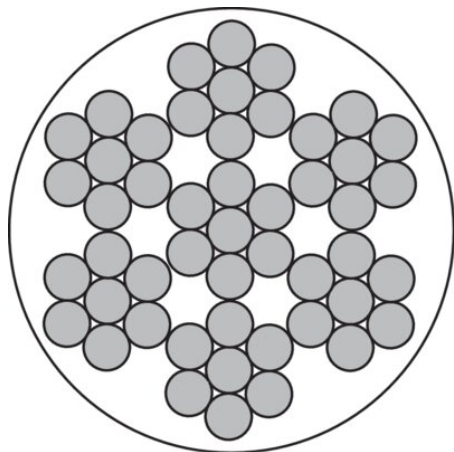

A galvanized rope equipped with a Steel core (WSC) and a transparent Polyamide/Nylon-coating. It can be used for various applications such as locking rope, signaling devices, etc but not for lifting.

... [Read more](#)

Rope construction: 6x7-WSC
Marking: According to standard
Temperature range: App +120°C
Finish: Polyamide/Nylon-coated
Standard: EN 12385-4
except from coating

Fill factor: 0,55

General use



Steel Wire Rope Polyamide/Nylon-coated 6x7-WSC

Lifting table

Part code	Rope diameter mm	Inner diameter mm	Colour	Tensile strength N/mm ²	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
105130250160130	2.5	1.6	transparent	1,770	1.76	1.11	-	1.1