
Chain Sling CSX-265 Grade 10

Product information

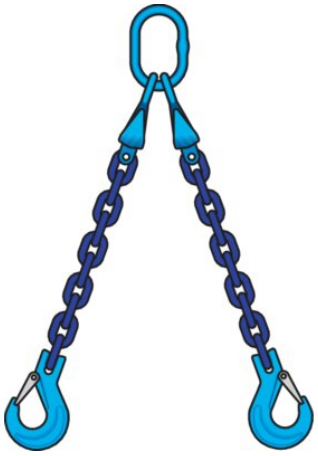

Design: Master link with shorting hook/link in one end and load hook - clevis in each leg.
Dimension: Ø 6–32 mm.

... *Read more*

Material: Alloy steel.
Marking: According to standard, CE-mark
Standard: EN 818-4
Warning: Not to be heat-treated.

Safety factor: 4:1
Grade: 10

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

Chain Sling CSX-265 Grade 10

Lifting table

Part code	Code	Chain diameter mm	WLL ton
2409CSX2P06.10	CSX-265-06	6	2
2409CSX2P07.10	CSX-265-07	7	2.65
2409CSX2P08.10	CSX-265-08	8	3.55
2409CSX2P10.10	CSX-265-10	10	5.6
2409CSX2P13.10	CSX-265-13	13	9.5
2409CSX2P16.10	CSX-265-16	16	14
2409CSX2P19.10	CSX-265-19	19	20
2409CSX2P20.10	CSX-265-20	20	22.4
2409CSX2P22.10	CSX-265-22	22	26.5
2409CSX2P26.10	CSX-265-26	26	37.5
2409CSX2P32.10	CSX-265-32	32	56

CERTEX Svenska AB
info@certex.se
08-758 00 10
© November 2026 - All Rights Reserved