
Chain Sling CSX-266 Grade 10

Product information

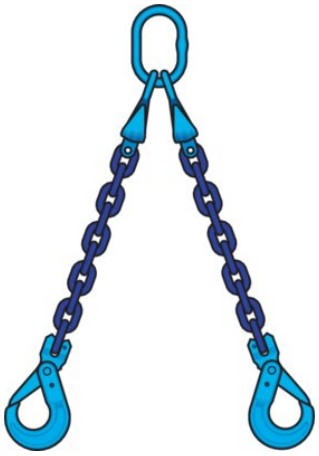

Design: Master link with shorting hook/link in one end and safety hooks - clevis in each leg.
Dimension: Ø 6–32 mm.

... *Read more*

Material: Alloy steel.
Marking: According to standard, CE-marked
Standard: EN 818-4
Warning: Not to be heat-treated.

Safety factor: 4:1
Grade: 10

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

Chain Sling CSX-266 Grade 10

Lifting table

Code	Chain diameter mm	WLL ton
CSX-266-06	6	2
CSX-266-07	7	2.65
CSX-266-08	8	3.55
CSX-266-10	10	5.6
CSX-266-13	13	9.5
CSX-266-16	16	14
CSX-266-19	19	20
CSX-266-20	20	22.4
CSX-266-22	22	26.5
CSX-266-26	26	37.5
CSX-266-32	32	56

CERTEX Svenska AB
info@certex.se
08-758 00 10
© November 2026 - All Rights Reserved