


Chain Sling CSX-276 Grade 10

Product information

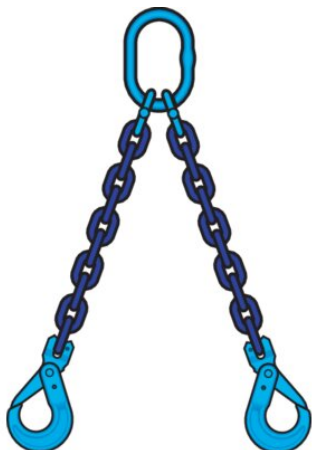

Design: Master link in one end and safety hook - clevis in each leg. Other combinations on demand.

Dimension: Ø 6–32 mm. (Other dimensions on demand).

... [Read more](#)

Material: Alloy steel grade 10.

Marking: According to standard, CE-marked

Standard: EN 818-4

Note: Hooks with eye and link will be used for chain diameter 19-32 mm.

Warning: Not to be heat-treated.

Safety factor: 4:1

Grade: 10

Chain Sling CSX-276 Grade 10

Lifting table

Part code	Code	Chain diameter mm	WLL ton
2409CSX2P06.10	CSX-276-06	6	2
2409CSX2P07.10	CSX-276-07	7	2.65
2409CSX2P08.10	CSX-276-08	8	3.55
2409CSX2P10.10	CSX-276-10	10	5.6
2409CSX2P13.10	CSX-276-13	13	9.5
2409CSX2P16.10	CSX-276-16	16	14
2409CSX2P19.10	CSX-276-19	19	20
2409CSX2P20.10	CSX-276-20	20	22.4
2409CSX2P22.10	CSX-276-22	22	26.5
2409CSX2P26.10	CSX-276-26	26	37.5
2409CSX2P32.10	CSX-276-32	32	56