


## Chain Sling CSX-276 Grade 10

### Product information

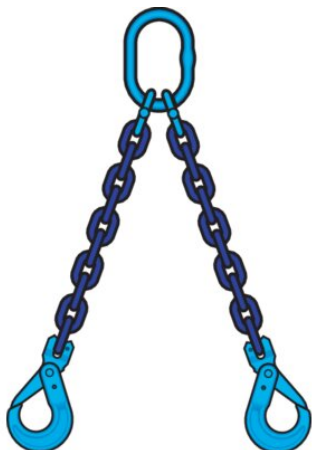

**Design:** Master link in one end and safety hook - clevis in each leg. Other combinations on demand.

**Dimension:** Ø 6–32 mm. (Other dimensions on demand).

... [Read more](#)

**Material:** Alloy steel grade 10.

**Marking:** According to standard, CE-marked

**Standard:** EN 818-4

**Note:** Hooks with eye and link will be used for chain diameter 19-32 mm.

**Warning:** Not to be heat-treated.

**Safety factor:** 4:1

**Grade:** 10

## Chain Sling CSX-276 Grade 10

### Lifting table

Part code	Code	Chain diameter mm	WLL ton
2409CSX2P06.10	CSX-276-06	6	2
2409CSX2P07.10	CSX-276-07	7	2.65
2409CSX2P08.10	CSX-276-08	8	3.55
2409CSX2P10.10	CSX-276-10	10	5.6
2409CSX2P13.10	CSX-276-13	13	9.5
2409CSX2P16.10	CSX-276-16	16	14
2409CSX2P19.10	CSX-276-19	19	20
2409CSX2P20.10	CSX-276-20	20	22.4
2409CSX2P22.10	CSX-276-22	22	26.5
2409CSX2P26.10	CSX-276-26	26	37.5
2409CSX2P32.10	CSX-276-32	32	56