
# Chain Sling CSX-276 Grade 10

## Product information

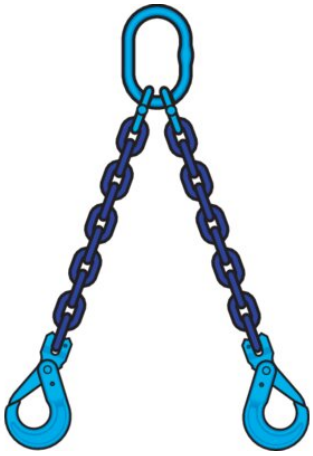

**Design:** Master link in one end and safety hook - clevis in each leg. Other combinations on demand.
**Dimension:** Ø 6–32 mm. (Other dimensions on demand).

... *Read more*

**Material:** Alloy steel grade 10.
**Marking:** According to standard, CE-mark
**Standard:** EN 818-4
**Note:** Hooks with eye and link will be used for chain diameter 19-32 mm.
**Warning:** Not to be heat-treated.

**Safety factor:** 4:1
**Grade:** 10

**CERTEX Svenska AB**
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

# Chain Sling CSX-276 Grade 10

## Lifting table

| Part code | Code | Chain diameter mm | WLL ton |
|---|---|---|---|
| 2409CSX2P06.10 | CSX-276-06 | 6 | 2 |
| 2409CSX2P07.10 | CSX-276-07 | 7 | 2.65 |
| 2409CSX2P08.10 | CSX-276-08 | 8 | 3.55 |
| 2409CSX2P10.10 | CSX-276-10 | 10 | 5.6 |
| 2409CSX2P13.10 | CSX-276-13 | 13 | 9.5 |
| 2409CSX2P16.10 | CSX-276-16 | 16 | 14 |
| 2409CSX2P19.10 | CSX-276-19 | 19 | 20 |
| 2409CSX2P20.10 | CSX-276-20 | 20 | 22.4 |
| 2409CSX2P22.10 | CSX-276-22 | 22 | 26.5 |
| 2409CSX2P26.10 | CSX-276-26 | 26 | 37.5 |
| 2409CSX2P32.10 | CSX-276-32 | 32 | 56 |

**CERTEX Svenska AB**
info@certex.se
08-758 00 10
© November 2026 - All Rights Reserved