
Master Link Assembly Pewag VWI Stainless

Product information

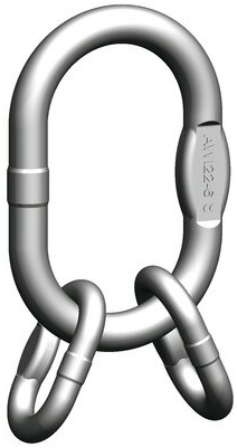

Stainless steel master link for 3- and 4-leg chainslings.

This stainless steel chain sling is electrically welded for a clean finish, stamped and ideally suited for assembling III- and IV-leg chain slings in welded or assembled systems. The dimensions are similar to DIN 5688-1.

The VWI Master link assembly is tested at 100 % of its load capacity. It is made from high-grade stainless steel with a higher resistance to acids and caustics than the standard four-leg chain slings G8, G10 and G12.

It is ideally suited for use in water and wastewater applications and can also be used in connection with chemicals and food products; however, restrictions will apply.

... *Read more*

Material: 1.4404 (AISI 316L), 1.4462 (AISI 318LN).
Marking: CE-mark
Finish: Pickled and blasted.


Safety factor: 4:1
Grade: 6

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

Master Link Assembly Pewag VWI Stainless

Blueprint



Lifting table

Part code	Code	WLL ton	Consisting of	Usable up to sling hooks following DIN 15401 No.	d mm	d1 mm	e mm	t mm	t1 mm mm	w mm mm	w1mm mm	Weight kg
400100080070	VWI 4-6	0.84	AWI 10-6 + 2 BWI 9-6	1.6	10	9	124	80	44	50	20	0.28
400100130070	VWI 5-6	1.3	AWI 13-6 + 2 BWI 10-6	2.5	13	10	154	110	44	60	20	0.52
400100260070	VWI 6/7-6	2.6	AWI 16-6 + 2 BWI 13-6	2.5	16	13	164	110	54	60	25	0.91
400100340070	VWI 8-6	3.35	AWI 18-6 + 2 BWI 16-6	5	18	16	205	135	70	75	34	1.64
400100530070	VWI 10-6	5.25	AWI 22-6 + 2 BWI 20-6	6	23	20	245	160	85	90	40	3.02
400100890070	VWI 13-6	8.9	AWI 26-6 + 2 BWI 22-6	8	27	23	295	180	115	100	50	4.78
400101320070	VWI 16-6	13.2	AWI 32-6 + 2 BWI 26-6	10	32	27	340	200	140	110	65	7.98

CERTEX Svenska AB
info@certex.se
08-758 00 10
© November 2026 - All Rights Reserved