



## Weld-on Point 8-0573

### Product information

Classic weld-on point without spring.

- Pivots through 180°.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts are traceable to Test Certification.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Lugs designed to assist the welding process.

**Material:** Forged alloy steel, quenched and tempered.

**Marking:** According to standard, CE-marked, WLL

**Standard:** EN 1677-1


**Note:** Never apply load except in the same direction with the pivot direction.

**Safety factor:** 5:1 (WLL 1-8 ton), 4:1 (WLL 10-30 ton)

Part Code	WLL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	L mm	W mm	HV mm	a mm	Weight kg	Total price
11.428-0573-20	20	186.5	93	100	25	37	180	70	110	37	234	91	20	4	6.5	N/A

### Technical data

Kind of attachment

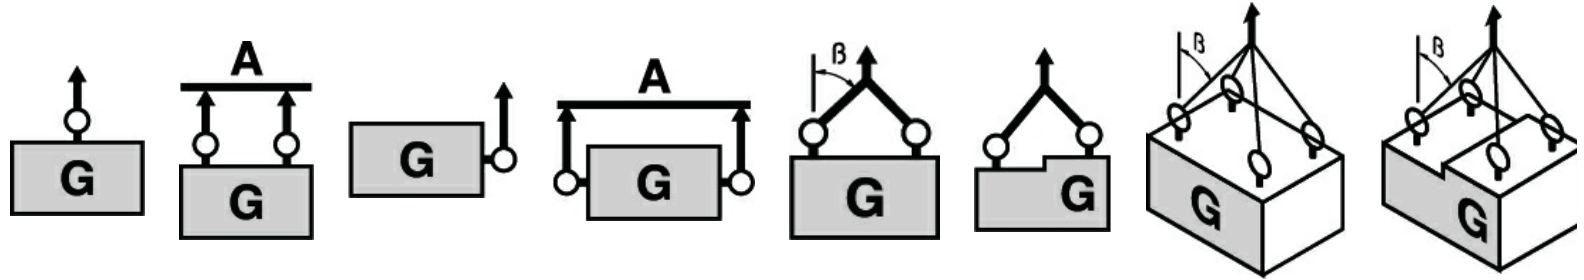

Number of legs	1	2	1	2	2	2	2	2	3-4	3-4	3-4
Load direction	0°	0°	90°	90°	0-45°	45-60°	Unsymm.	Unsymm.	0-45°	45-60°	Unsymm.
Code	WLL (ton)										
8-0573-01	1	2	1	2	1,4	1	1	1	2,1	1,5	1
8-0573-03	3	6	3	6	4,2	3	3	3	6,3	4,5	3
8-0573-05	5	10	5	10	7	5	5	5	10,5	7,5	5
8-0573-08	8	16	8	16	11,2	8	8	8	16,8	12	8
8-0573-10	10	20	10	20	14	10	10	10	21	15	10
8-0573-20	20	40	20	40	28	20	20	20	42	30	20
8-0573-30	30	60	30	60	42	30	30	30	63	45	30

# Blueprint

