

Lifting Eye RUD VLBG-PLUS Long Bolt

Product information

VLBG load ring will turn 360°, adjustable in pull direction. Load ring foldable, full WLL in any load direction.

... [Read more](#)




Temperature range: -40°C up to 200°C

Safety factor: 4:1

Lifting Eye RUD VLBG-PLUS Long Bolt

Blueprint

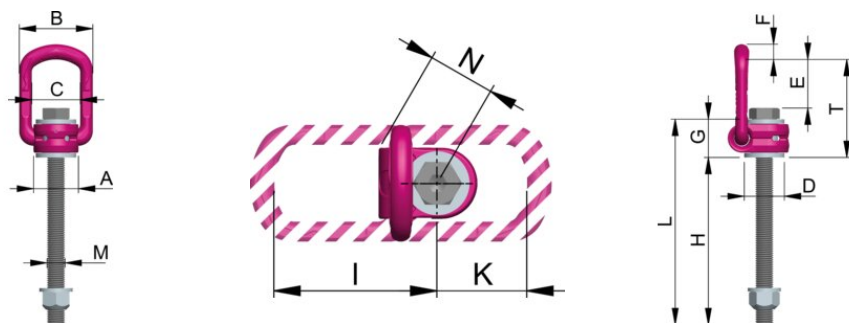

Lifting table

Part code	Code	WLL ton	Thread mm	A mm	B mm	C mm	D, mm	E mm	F mm	G, mm	H, mm	I mm mm	K mm	L mm	Mmm mm	Nmm mm	T mm
42158600470	VLBG-PLUS Long-Bolt	0.63	M8	30	54	34	24	40	10	29	8-76	75	45	37-105	M8	32	75
42158600471	VLBG-PLUS Long-Bolt	0.9	M10	30	54	34	24	39	10	29	96	75	45	125	M10	32	75
42158600472	VLBG-PLUS Long-Bolt	1.35	M12	32	54	34	26	38	10	29	12-116	75	45	41-145	M12	32	75
42158600474	VLBG-PLUS Long-Bolt	2	M16	33	56	36	30	39	13.5	36	16-149	86	47	50-185	M16	38	85
42158600476	VLBG-PLUS Long-Bolt	3.5	M20	50	82	54	45	55	16.5	43	187	113	64	230	M20	48	110
42158600478	VLBG-PLUS Long-Bolt	4.5	M24	50	82	54	45	67	18	43	220	130	78	265	M24	48	125
42158600480	VLBG-PLUS Long-Bolt	6.7	M30	60	103	65	60	67	22.5	61	30-279	151	80	90-340	M30	67	147
42158600289	VLBG-PLUS Long-Bolt	8	M36	77	122	82	70	97	26.5	77	36-223	205	110	113-300	M36	87	197
42158600290	VLBG-PLUS Long-Bolt	10	M42	77	122	82	70	94	26.5	77	42-273	205	110	119-350	M42	70	197
42158600292	VLBG-PLUS Long-Bolt	20	M48	95	156	100	95	105	36	87	48-303	230	130	135-390	M48	100	222