


Roundsling Assembly RR-276

Product information

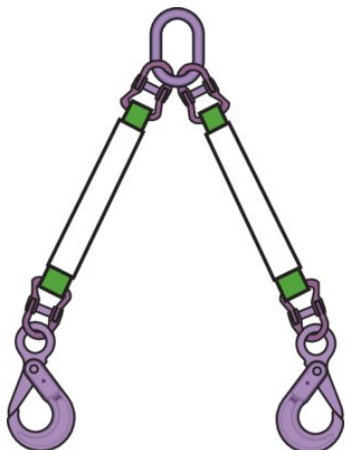

Design: Roundsling covered with extra protection sleeve and provided with strengthen eye in each end, assembled as a tool in combination with lifting details in grade 8. Max manufacturing length 20 m.

Stretch with working load: 2-3%.

Length tolerance: Nominal length $\pm 2\%$.

Safety factor: Forge 4:1 and round sling 7:1

... [Read more](#)

Material: Polyester. Resistant to most acids but not strong alkalizes.

Marking: According to standard, The slings are provided with a label with manufacturer's symbol, working load limit (WLL) and CE marking.

Temperature range: app. -40° - $+100^{\circ}\text{C}$.

Standard: EN 1492-2

Grade: 10

Roundsling Assembly RR-276

Lifting table

Part code	WLL ton	Colour
3403	1.4	Violet
3403	2.8	Green
3403	4.2	Yellow
3403	5.6	Grey
3403	7	Red
3403	8.4	Brown
3403	11.2	Blue
3403	14	Orange