


Spiral Rope PVC-coated 1X19 Stainless

Product information

Z SS

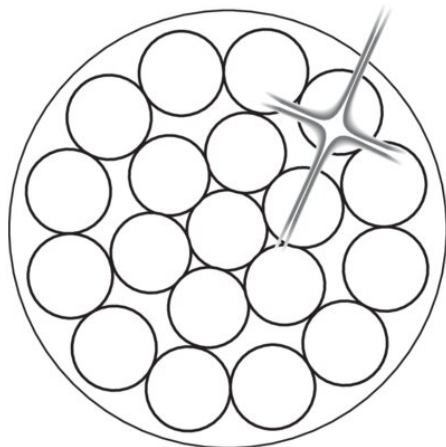

A stainless spiral rope with a white PVC-coating. It can be used for various applications such as signaling devices, etc but not for lifting.

The PVC-coating is UV stabilized which makes it suitable for longterm outdoor use and it is fully compliant with REACH Directive 1907/2006.

[... Read more](#)

Rope construction: Spiral rope 1x19

Material: AISI 316 / EN 1.4401

Marking: According to standard

Temperature range: -30°C up to +70°C

Finish: PVC-coated, see table for colour

Standard: EN 12385-10

except material and coating

Fill factor: 0,74

General use



Spiral Rope PVC-coated 1X19 Stainless

Lifting table

Part code	Rope diameter mm	Inner diameter mm	Colour	Tensile strength N/mm ²	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
105120050030051	5	3	White	1,570	7.43	5.25	-	5.1
105120600400051	6	4	White	1,570	13.2	9.34	-	9.1
105120800400051	8	4	White	1,570	13.2	9.34	-	9.9
105120800500051	8	5	White	1,570	20.6	14.6	-	14