
Steel Wire Rope PVC-coated 6x19M-WSC

Product information



General use

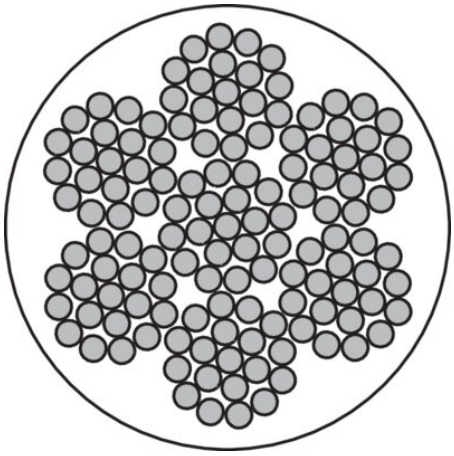

Slings





A galvanized rope equipped with a Wire Strand Core (WSC) and has a PVC-coating. It can be a good choice for basic lifting applications such as lifting slings, security rope in studios/theaters premises, etc.

The PVC-coating is UV stabilized which makes it suitable for longterm outdoor use and it is fully compliant with REACH Directive 1907/2006.

... *Read more*

Rope construction: 6x19-WSC
Marking: According to standard
Temperature range: -30°C up to +70°C
Finish: PVC-coated, see table for colour
Standard: EN 12385-4
except from coating

Fill factor: 0.53

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

Steel Wire Rope PVC-coated 6x19M-WSC

Lifting table

Part code	Rope diameter mm	Inner diameter mm	Colour	Tensile strength N/mm²	Min. breaking force kN	Steel area mm²	Weight kg/100m
105130500300100	5	3	transparent	1,770	5.77	3.76	3.5
105130600400100	6	4	transparent	1,770	10.3	6.69	7.6

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved