


## Steel Wire Rope PVC-coated 6x19M-WSC

### Product information

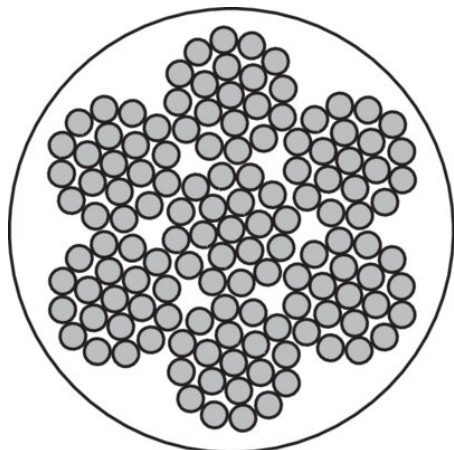

A galvanized rope equipped with a Wire Strand Core (WSC) and has a PVC-coating. It can be a good choice for basic lifting applications such as lifting slings, security rope in studios/theaters premises, etc.

The PVC-coating is UV stabilized which makes it suitable for longterm outdoor use and it is fully compliant with REACH Directive 1907/2006.

... [Read more](#)

**Rope construction:** 6x19-WSC

**Marking:** According to standard

**Temperature range:** -30°C up to +70°C

**Finish:** PVC-coated, see table for colour

**Standard:** EN 12385-4

*except from coating*

**Fill factor:** 0.53

General use



Slings



## Steel Wire Rope PVC-coated 6x19M-WSC

### Lifting table

Part code	Rope diameter mm	Inner diameter mm	Colour	Tensile strength N/mm <sup>2</sup>	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
105130500300100	5	3	transparent	1,770	5.77	3.76	-	3.5
105130600400100	6	4	transparent	1,770	10.3	6.69	-	7.6