


## Stainless Steel Wire Rope SS 6x7-WSC

### Product information

SZ SS

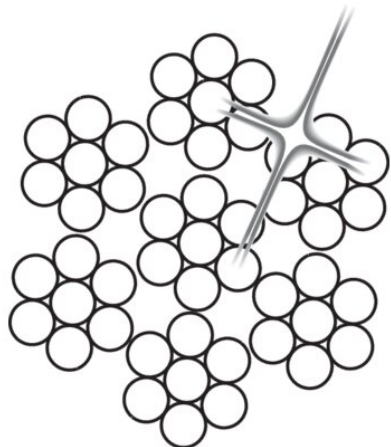

**Typical applications:** Rigging, stays, controls and signalling devices.

[... Read more](#)

**Material:** AISI 316.

**Marking:** According to standard

**Standard:** EN 12385-4

**Fill factor:** 0.55

General use



Stay rope



## Stainless Steel Wire Rope SS 6x7-WSC

### Lifting table

Part code	Rope diameter	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
108100104620098	1	1,570	Stainless	sZ	0.61	0.43	No-Lube	0.38
108100154620098	1.5	1,570	Stainless	sZ	1.37	0.97	No-Lube	0.86
108100204620098	2	1,570	Stainless	sZ	2.44	1.73	No-Lube	1.54
108100254620098	2.5	1,570	Stainless	sZ	3.81	2.7	No-Lube	2.4
108100304620098	3	1,570	Stainless	sZ	5.48	3.89	No-Lube	3.46
108100404620098	4	1,570	Stainless	sZ	9.75	6.91	No-Lube	6.14
108100504620098	5	1,570	Stainless	sZ	15.2	10.8	No-Lube	9.6
108100604620098	6	1,570	Stainless	sZ	21.9	15.6	No-Lube	13.8
108100704620098	7	1,570	Stainless	sZ	29.8	21.2	No-Lube	18.8
108100804620098	8	1,570	Stainless	sZ	39	27.6	No-Lube	24.6