


## SS 6x19-FC

### Product information

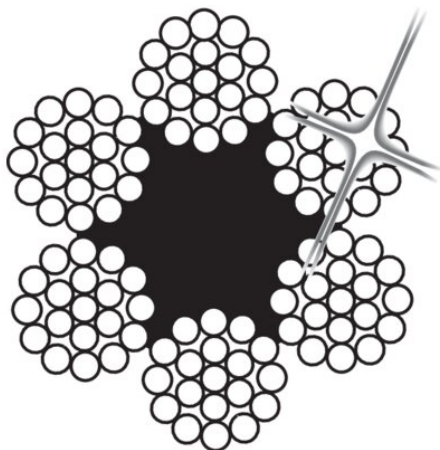

**Typical applications:** Cranes, hoist blocks, lifts, wire rope slings.

[... Read more](#)

**Material:** AISI 316.

**Marking:** According to standard


**Standard:** EN 12385-4

**Fill factor:** 0.45

Slings



Overhead cranes



## SS 6x19-FC

### Lifting table

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
108100304620128	3	1,570	Stainless	sZ	4.34	3.21	No-Lube	3.1
108100404620128	4	1,570	Stainless	sZ	7.71	5.71	No-Lube	5.5
108100504620128	5	1,570	Stainless	sZ	12	8.93	No-Lube	8.7
108100604620128	6	1,570	Stainless	sZ	17.4	12.9	No-Lube	13
108100704620128	7	1,570	Stainless	sZ	23.6	17.5	No-Lube	17
108100804620128	8	1,570	Stainless	sZ	30.8	22.8	No-Lube	22
108100904620128	9	1,570	Stainless	sZ	39	28.9	No-Lube	28
108101004620128	10	1,570	Stainless	sZ	48.2	35.7	No-Lube	35
108101204620128	12	1,570	Stainless	sZ	69.4	51.4	No-Lube	50