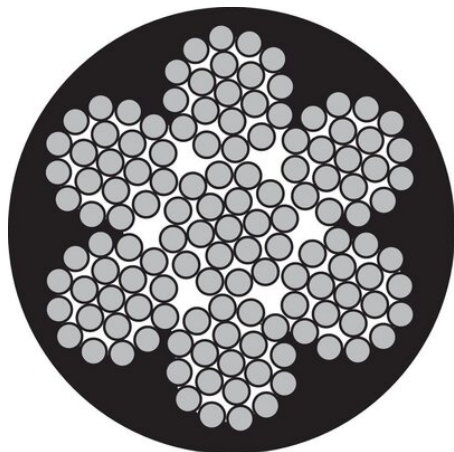


## Spiral Rope PVC-coated 1x19

### Product information

**G**

A galvanized spiral rope with a white PVC-coating. It can be used for various applications such as signaling devices, etc but not for lifting.

The PVC-coating is UV stabilized which makes it suitable for longterm outdoor use and it is fully compliant with REACH Directive 1907/2006.

... [Read more](#)

**Rope construction:** Spiral rope 1x19  
**Marking:** According to standard  
**Temperature range:** -30°C up to +70°C  
**Finish:** PVC-coated (white)  
**Standard:** EN 12385-10  
*except from coating*

**Fill factor:** 0,74

General use



## Spiral Rope PVC-coated 1x19

### Lifting table

| Part code       | Rope diameter<br>mm | Inner diameter<br>mm | Colour | Tensile strength<br>N/mm <sup>2</sup> | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication | Weight<br>kg/100m |
|-----------------|---------------------|----------------------|--------|---------------------------------------|---------------------------|-------------------------------|-------------|-------------------|
| 105130120090251 | 1.2                 | 0.9                  | White  | 1,770                                 | 0.75                      | 0.47                          | -           | 0.5               |
| 105140120090251 | 1.2                 | 0.9                  | White  | 1,960                                 | 0.84                      | 0.47                          | -           | 0.5               |