Spiral Rope PVC-coated 1x19

Product information

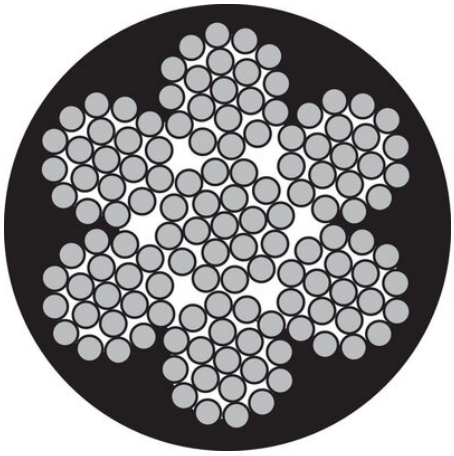

General use

A galvanized spiral rope with a white PVC-coating. It can be used for various applications such as signaling devices, etc but not for lifting.

The PVC-coating is UV stabilized which makes it suitable for longterm outdoor use and it is fully compliant with REACH Directive 1907/2006.

... *Read more*

Rope construction: Spiral rope 1x19
Marking: According to standard
Temperature range: -30°C up to +70°C
Finish: PVC-coated (white)
Standard: EN 12385-10
except from coating

Fill factor: 0,74

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

Spiral Rope PVC-coated 1x19

Lifting table

Part code	Rope diameter mm	Inner diameter mm	Colour	Tensile strength N/mm²	Min. breaking force kN	Steel area mm²	Weight kg/100m
105130120090251	1.2	0.9	White	1,770	0.75	0.47	0.5
105140120090251	1.2	0.9	White	1,960	0.84	0.47	0.5

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved