Endurance 50DB

Product information

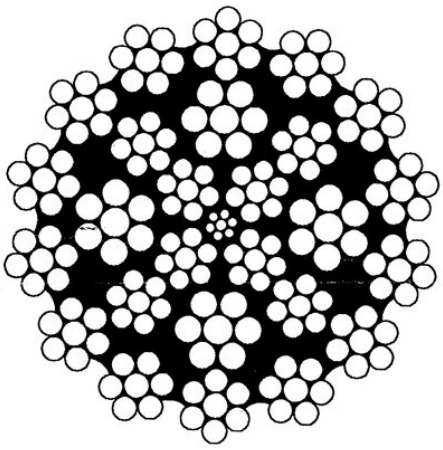

Excellent Resistance to Rotation giving over three times more lifting height than a conventional 18 x 7 class rope
Flexibility is optimised by the unique strand and rope construction.
Langs Lay construction combines excellent wear characteristics with efficient spooling on the drum.

Standard: EN 12385-4
ISO 4309 Rope Category No: All Diameters **RCN.23-1**

... *Read more*

Features: Very High Breaking Load
Material: High Carbon Steel
Marking: On Termination ID and CE mark
Finish: Galvanised as standard

Fill factor: 0.64
RCN: 23-1

CERTEX Svenska AB
info@certex.se
08-758 00 10

© September 2026 - All Rights Reserved

Endurance 50DB

Lifting table

Part code	Rope diameter	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
102101106270132	11	1,960	Galvanized	zZ	93.9	-	A-2	51.8
102101606270132	16	1,960	Galvanized	zZ	199	-	A-2	110

CERTEX Svenska AB
info@certex.se
08-758 00 10
© September 2026 - All Rights Reserved