


## Steel Wire Rope 6x12-7FC

---

### Product information

SZ G

[... Read more](#)

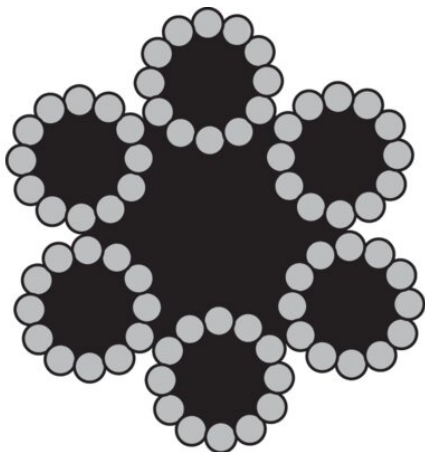

**Rope construction:** 6x12-7FC

**Fill factor:** 0.30

## Steel Wire Rope 6x12-7FC

### Lifting table

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
101100304250270	3	1,770	Galvanized	sZ	3.33	2.09	Dry	2.1
101100404250270	4	1,770	Galvanized	sZ	5.92	3.71	Dry	3.7
101100504250270	5	1,770	Galvanized	sZ	9.25	5.8	Dry	5.8
101100604250270	6	1,770	Galvanized	sZ	13.3	8.35	Dry	8.3
101100704250270	7	1,770	Galvanized	sZ	18.1	11.4	Dry	11
101100804250270	8	1,770	Galvanized	sZ	23.7	14.8	Dry	15
101101004250270	10	1,770	Galvanized	sZ	37	23.2	Dry	23
101101204250270	12	1,770	Galvanized	sZ	53.3	33.4	Dry	33