

## Electric winch TRBoxter BT 1-speed

### Product information



#### General:

Electric winch for loads from 250 up to 1500 kg with low voltage control and 1 speed. Multifunctional electric winch offering many rope attachments, rope outlets and options. Robust and compact, it benefits of a high operating factor for all kind of applications such as for example: Industrial applications, Building and public works, Theatre applications, Integration into many types of devices, cranes, material lifts etc.

#### Technical properties:

- Welded steel drum.
- Aluminium casing.
- The low voltage control protects the user from electrical risks.
- Asynchronous, single phase motors (230 V – 50 Hz P=0.75 or 1.1 kW depending on the models)
- Threephase motors (400 V – 50 Hz P= 0.75 or 1.1 kW depending on the models).
- Reducer sealed in oil bath with helical gears.
- 24 V or 190 V direct current electromagnetic brake (depending on the models).
- Electrical equipment under sealed cover.
- Very low voltage, 24 V remote control with socket – IP 65 protection.

#### Optional:

- Limit switch
- Radio control
- Load limiter
- Lengthened drum models. Wire rope capacity will increase by 1.5 x standard capacity.

... [Read more](#)

**Material:** Aluminum casing / Steel drum

**Marking:** According to standard, CE-marked


**Temperature range:** -10°C to +50°C.

**Standard:** EN 14492-1

**Warning:** If the winch is used for lifting of a load, a limit switch is mandatory!

## Electric winch TRBoxter BT 1-speed

### Blueprint

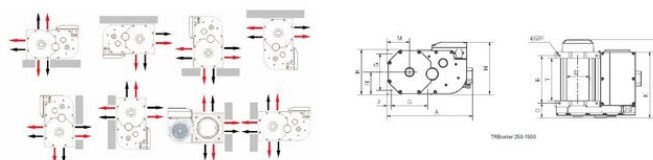

### Lifting table

Part code	WLL ton	Lifting height m	Model	Rope Ø mm	Power	WLL top layer ton	Speed top layer m/min	Motor kW	Speed 1st layer m/min	FEM	Number of layers	Weight kg
5406TRBOXTER253BT14	0.29	56	TRBOXTER253BT14	5	3Ph-400V	0.25	15.4	0.75	13.3	1Am	3	49
5406TRBOXTER503BT4	0.6	42	TRBOXTER503BT4	7	3Ph-400V	0.5	4.9	0.75	4	1Bm	3	49
5406TRBOXTER501BT11	0.6	42	TRBOXTER501BT11	7	1 Ph - 230 V	0.5	12.2	1.1	10	1Bm	3	51
5406TRBOXTER503BT11	0.6	42	TRBOXTER503BT11	7	3Ph-400V	0.5	12.2	1.1	10	1Bm	3	51
5406TRBOXTER503BT21	0.6	42	TRBOXTER503BT21	7	3Ph-400V	0.5	24.2	2.2	20	1Bm	3	59
5406TRBOXTER603BT15	0.75	93	TRBOXTER603BT15	7	3Ph-400V	0.6	18.6	2.2	14.9	1Am	4	100

## Electric winch TRBoxter BT 1-speed

Type	Drum	Measurements (mm)													
Model type		A	B	C	Ø D	E	Ø F	G	H	J	K	L	M	N	T
TRBOXTER															
250 to 500 kg	standard	462	243	79	121	255	10.5	197	284.5	23	356	419.5	121.5	121.5	230
	long	462	243	79	121	370	10.5	197	284.5	23	471	534.5	121.5	121.5	345
TRBOXTER															
600 to 1500 kg	standard	554	304	105.5	159	318	12.5	246	332.5	29	493.5	515.5	152	152	290
	long	554	304	105.5	159	461	12.5	246	332.5	29	493.5	656	152	152	435