
Prestressed Rope - Dyform

Product information

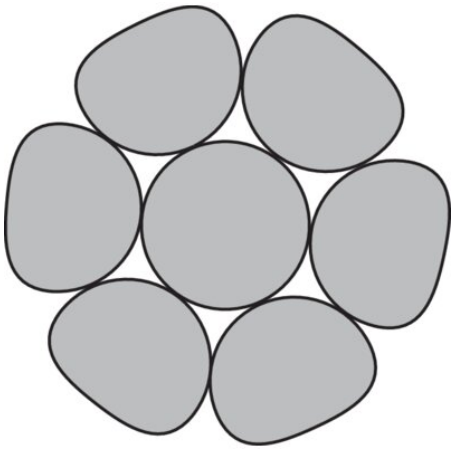

Design: The compacted ropes consist of 7 wires (6 outer wires laid over a core wire). You can also get the ropes plastic-coated or or alternatively greased and plastic-coated. Plastic thickness are available from 0,75-2,5 mm (normally 1,5 mm). Generally the ropes are supplied in coils.

... *Read more*

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved