


## Lifting Triangle

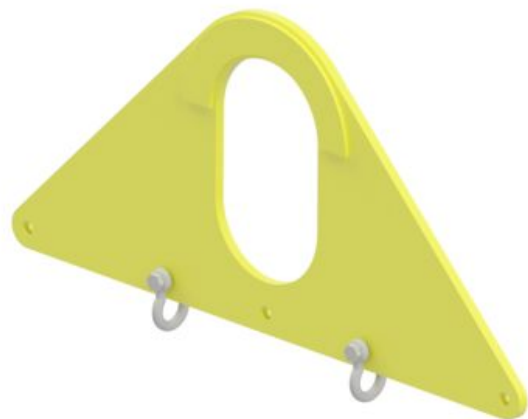

### Product information

**General:** The lifting triangle has the same function as a short beam or a spreader. Given working load limits are valid for a maximum top sling angle of 90°. For top angles between 90°-120° working load limit shall be reduced by 30%. All lifting triangles are supplied with 2 shackles according to table. Working load limit in the centre shackle hole is equal to the working load limit of the shackle according to the table.

**Design:** Cut sheet metal. Wear plates and spacers for the shackles.

**Proof:** Batch proof 2 x WLL.

**Material:** Plate of high-strength structural steel.

**Marking:** WLL and CE-marking.

**Finish:** Yellow painted.

**Note:** Other loads and dimensions are available on request.

Part Code	WLL ton	Shackle	A mm	B mm	H mm	K mm	L mm	Weight kg	Total price
13.406670020.9	2	11.311	250	150	340	290	700	13	N/A
13.406670040.9	4	11.311	250	150	360	290	700	20	N/A
13.406670060.9	6	11.311	250	150	375	290	700	31	N/A
13.406670100.9	10	11.311	300	180	460	360	870	55	N/A
13.406670150.9	15	11.311	300	180	490	360	870	74	N/A
13.406670200.9	20	11.311	300	180	525	360	870	100	N/A

Blueprint

