Beam Clamp IPBC

Product information



The Crosby IP Model IPBC is a horizontal lifting clamp with a pretension system, designed for horizontal transfer operations. Its welded alloy steel body provides strength in a compact design, while the integrated handle facilitates clamp positioning. Available with working load limits of 1 to 3 tonnes and jaw openings up to 25 mm.

Best used for:

- Horizontal transfer operations requiring lifting clamps with a pretension system.
- Applications requiring a clamp with a jaw opening of 0–20 mm or 0–25 mm, depending on model.

Product benefits:

- Welded alloy steel body combines structural strength with compact dimensions.
- Integrated handle allows easier positioning during clamp installation.
- Available capacities and jaw openings support different lifting requirements.
- Individually proof tested to twice the WLL, with certification supplied.
- Individual serial numbers and test certificates support traceability and inspection documentation.

... *Read more*


Features:
Material: Alloy steel.
Marking: According to standard, CE-mark, WLL, Logo, Type, Jaw opening, Serial number, Proof load test date
Temperature range: -40°C (-40°F) up to +100°C (+212°F)
Standard: EN 13155

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

Beam Clamp IPBC

Blueprint

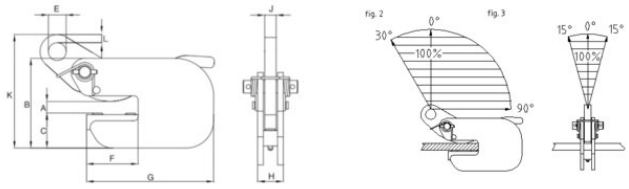

Lifting table

Part code	Code	WLL ton	Jaw width mm	A mm	B mm	C mm	E mm	F mm	G mm	H mm	J mm	K mm	L mm	Weight kg
502100100200210	1-IPBC	1	0-20	0-20	132	52	26	75	185	36	16	182	12	3.5
502100200250210	2-IPBC	2	0-25	0-25	152	62	30	82	210	49	20	218	15	6.5
502100300250210	3-IPBC	3	0-25	0-25	157	66	30	82	210	57	20	225	15	8.5

CERTEX Svenska AB
info@certex.se
08-758 00 10
© November 2026 - All Rights Reserved