
Bow Shackle Gunnebo SMS 1619B

Product information

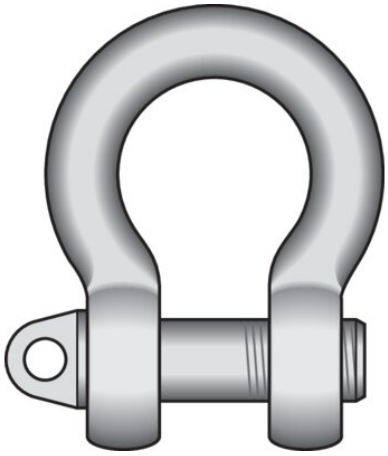

Shackle SMS 1619 B is a Class 3 bow shackle with a threaded pin for lifting and rigging connections. Available variants have WLLs from 0.6 to 2.4 tonnes at a 5:1 design factor; select the correct size and do not exceed its rated WLL.

Best used for:

- Rigging connections requiring a Class 3 bow shackle.
- Assemblies where the pin size and WLL match the connected equipment.

Product benefits:

- Thread sizes from M10 to M20 provide options across the listed WLLs.
- Hot-dip galvanizing gives the steel shackle a protective surface finish.
- A ±5% forging tolerance on internal dimensions helps manage fit.

... *Read more*

Material: Grade 3.
Marking: CE-mark, WLL, supplies code and grade.
Finish: Hot-dip galvanized


Safety factor: 5:1
Grade: 3

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

Bow Shackle Gunnebo SMS 1619B

Blueprint



Lifting table

Part code	WLL ton	Thread mm	B mm	D mm	E mm	L mm	Z mm	Weight kg
420100060450	0.6	M10	15	11	26	34	20	0.13
420100090450	0.9	M12	20	13	35	45	26	0.25
420100150450	1.5	M16	24	16	42	55	33	0.5
420100240450	2.4	M20	28	19	50	65	40	0.83

CERTEX Svenska AB
info@certex.se
08-758 00 10
© November 2026 - All Rights Reserved