
WINPRO flex 300 Chain PC/B cutting length

Product information

General: Specially rugged profile chain in grade 12 for lifting.
Standard: Corresponding to PAS 1061 with modifications.

... *Read more*

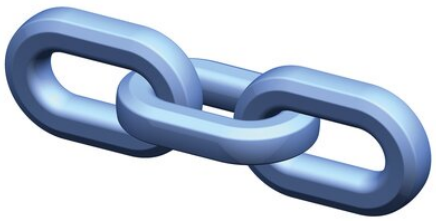

Material: Alloy steel grade 12.
Marking: Every link is marked with manufactor ID and grade.
Temperature range: -60ºC to +300ºC.
Finish: Light blue powdercoated.
Warning: Not to be heat-treated.


Grade: 12

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

WINPRO flex 300 Chain PC/B cutting length

Blueprint



Lifting table

Part code	Chain diameter mm	WLL ton	Min. breaking force kN	D mm	E mm	H mm	Weight kg/m
204100700000040	7	2.36	-	7	22	10	1.36
204101000000040	10	5	196	10	33	14	2.7
204101300000040	13	8	314	13	41	19	4.8
204101600000040	16	12.5	491	16	51	23	7.17

CERTEX Svenska AB
info@certex.se
08-758 00 10
© November 2026 - All Rights Reserved