# Steel Wire Rope Ropetex S19 Stainless Steel

**Product information**

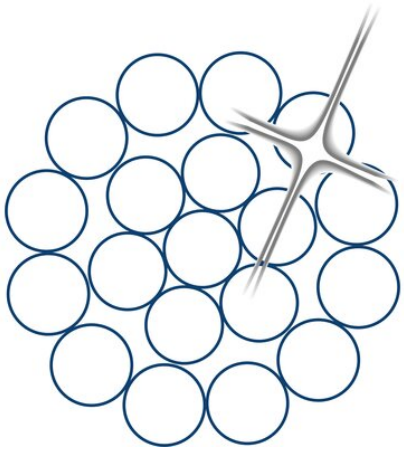

Stay rope



Agriculture and livestock



ROPETEX

S Z SS

ROPETEX S19 is a stainless steel wire rope. It's very corrosion resistant and durable, well suited for marine applications. The S19 rope has very little stretch which makes is excellent for standing rigging, stays, controls and architectural balustrades and green walls.

ROPETEX S19 can be provided with swaged terminals as end fittings.

... *Read more*

**Rope construction:** 1x19
**Material:** AISI 316 / EN 1.4401
**Marking:** According to standard
**Temperature range:** -40°C up to +200°C
**Standard:** EN 12385-10
*except material*
**Warning:** Not to be used for lifting purposes

**Fill factor:** 0,74

**CERTEX Svenska AB**
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

# Steel Wire Rope Ropetex S19 Stainless Steel

## Lifting table

| Part code | Rope diameter mm | Tensile strength N/mm² | Finish | Rope lay | Min. breaking force kN | Steel area mm² | Lubrication | Weight kg/100m |
|---|---|---|---|---|---|---|---|---|
| 108100101620018 | 1 | 1,570 | Stainless | S | 0.83 | 0.58 | No-Lube | 0.49 |
| 108100102620018 | 1 | 1,570 | Stainless | Z | 0.83 | 0.58 | No-Lube | 0.49 |
| 108100131620018 | 1.25 | 1,570 | Stainless | S | 1.29 | 0.91 | No-Lube | 0.74 |
| 108100132620018 | 1.25 | 1,570 | Stainless | Z | 1.29 | 0.91 | No-Lube | 0.74 |
| 108100151620018 | 1.5 | 1,570 | Stainless | S | 1.86 | 1.31 | No-Lube | 1.09 |
| 108100152620018 | 1.5 | 1,570 | Stainless | Z | 1.86 | 1.31 | No-Lube | 1.09 |
| 108100201620018 | 2 | 1,570 | Stainless | S | 3.3 | 2.33 | No-Lube | 1.94 |
| 108100202620018 | 2 | 1,570 | Stainless | Z | 3.3 | 2.33 | No-Lube | 1.94 |
| 108100251620018 | 2.5 | 1,570 | Stainless | S | 5.16 | 3.65 | No-Lube | 3.03 |
| 108100252620018 | 2.5 | 1,570 | Stainless | Z | 5.16 | 3.65 | No-Lube | 3.03 |
| 108100301620018 | 3 | 1,570 | Stainless | S | 7.43 | 5.25 | No-Lube | 4.37 |
| 108100302620018 | 3 | 1,570 | Stainless | Z | 7.43 | 5.25 | No-Lube | 4.37 |
| 108100401620018 | 4 | 1,570 | Stainless | S | 13.2 | 9.34 | No-Lube | 7.76 |
| 108100402620018 | 4 | 1,570 | Stainless | Z | 13.2 | 9.34 | No-Lube | 7.76 |
| 108100501620018 | 5 | 1,570 | Stainless | S | 20.6 | 14.6 | No-Lube | 12.1 |
| 108100502620018 | 5 | 1,570 | Stainless | Z | 20.6 | 14.6 | No-Lube | 12.1 |
| 108100601620018 | 6 | 1,570 | Stainless | S | 29.7 | 21 | No-Lube | 17.5 |
| 108100602620018 | 6 | 1,570 | Stainless | Z | 29.7 | 21 | No-Lube | 17.5 |
| 108100701620018 | 7 | 1,570 | Stainless | S | 40.5 | 28.6 | No-Lube | 23.8 |
| 108100702620018 | 7 | 1,570 | Stainless | Z | 40.5 | 28.6 | No-Lube | 23.8 |

**CERTEX Svenska AB**
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved