


## Stållina rostfri 6x19M-FC

### Produktinformation

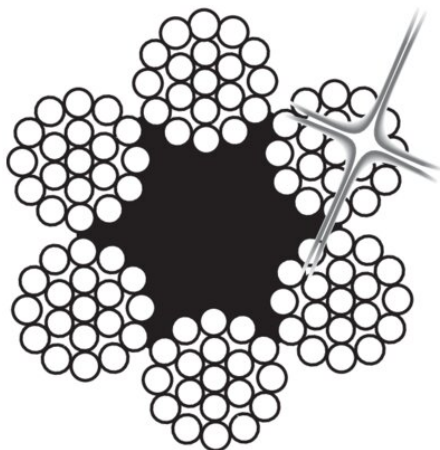

**Typical applications:** Cranes, hoist blocks, lifts, wire rope slings.

[... Read more](#)

**Konstruktion:** 6x19M-FC (114-trådig)

**Material:** AISI 316

**Märkning:** Enligt standard


**Standard:** EN 12385-4

**Fyllnadsfaktor:** 0.45

Redskap



Telfer/ Travers



## Stållina rostfri 6x19M-FC

### Lyfttabell

Art.nr	Lindiameter mm	Trådhållfasthet N/mm <sup>2</sup>	Ytbehandling	Rope lay	Min brottkraft kN	Stålärea mm <sup>2</sup>	Smörjning	Vikt kg/100m
108100304620128	3	1 570	Rostfri	sZ	4,34	3,21	No-Lube	3,1
108100404620128	4	1 570	Rostfri	sZ	7,71	5,71	No-Lube	5,5
108100504620128	5	1 570	Rostfri	sZ	12	8,93	No-Lube	8,7
108100604620128	6	1 570	Rostfri	sZ	17,4	12,9	No-Lube	13
108100704620128	7	1 570	Rostfri	sZ	23,6	17,5	No-Lube	17
108100804620128	8	1 570	Rostfri	sZ	30,8	22,8	No-Lube	22
108100904620128	9	1 570	Rostfri	sZ	39	28,9	No-Lube	28
108101004620128	10	1 570	Rostfri	sZ	48,2	35,7	No-Lube	35
108101204620128	12	1 570	Rostfri	sZ	69,4	51,4	No-Lube	50