
Endurance 50DB

Produktinformation

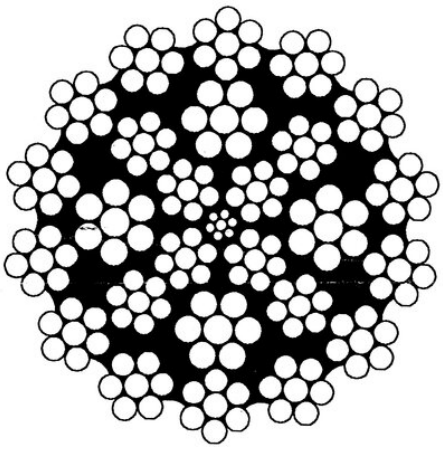

Excellent Resistance to Rotation giving over three times more lifting height than a conventional 18 x 7 class rope
Flexibility is optimised by the unique strand and rope construction.
Langs Lay construction combines excellent wear characteristics with efficient spooling on the drum.

Standard: EN 12385-4
ISO 4309 Rope Category No: All Diameters **RCN.23-1**

... *Read more*

Fyllnadsfaktor: 0.64
RCN: 23-1

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

Endurance 50DB

Lyfttabell

Art.nr	Lindiameter	Trådhållfasthet N/mm²	Ytbehandling	Rope lay	Min brottkraft kN	Smörjning	Vikt kg/100m
102101106270132	11	1 960	Galvaniserad	zZ	93,9	A-2	51,8
102101606270132	16	1 960	Galvaniserad	zZ	199	A-2	110

CERTEX Svenska AB
info@certex.se
08-758 00 10
© November 2026 - All Rights Reserved