Stållina Dyform 34LR PI MAX

Produktinformation

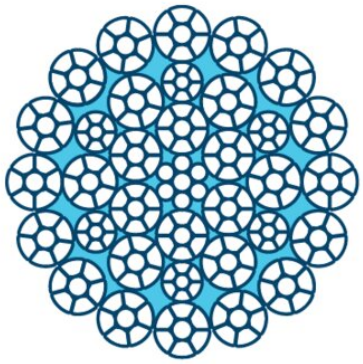

Dyform 34 LR PI MAX is a high performance compacted low rotational rope that consists of varying multistrand rope designs which have undergone a final rope compacting process. It incorporates a plastic layer (PI) between the inner and outer part of the rope.

... *Read more*

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

Stållina Dyform 34LR PI MAX

Lyfttabell

Art.nr	Lindiameter mm	Trådhållfasthet N/mm²	Ytbehandling	Rope lay	Min brottkraft kN	Smörjning	Vikt
104102806270529	28	1 960	Galvaniserad	zZ	712	SupplierStandard	392

CERTEX Svenska AB
info@certex.se
08-758 00 10
© November 2026 - All Rights Reserved