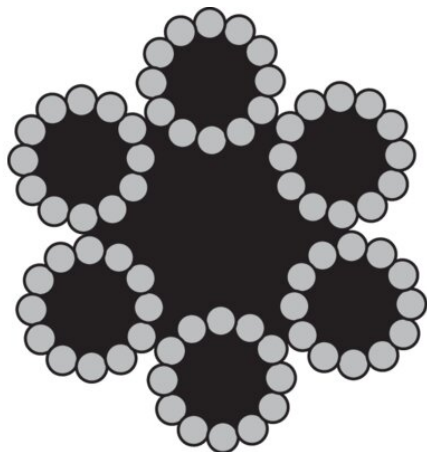


Stållina 6x12-7FC

Produktinformation

SZ G

[... Read more](#)**Konstruktion:** 6x12-7FC (72-trådig)**Fyllnadsfaktor:** 0.30

Stållina 6x12-7FC

Lyfttabell

| Art.nr | Lindiameter mm | Trådhållfasthet N/mm ² | Ytbehandling | Rope lay | Min brottkraft kN | Stålärea mm ² | Smörjning | Vikt kg/100m |
|-----------------|-------------------|--------------------------------------|--------------|----------|----------------------|-----------------------------|-----------|-----------------|
| 101100304250270 | 3 | 1 770 | Galvaniserad | sZ | 3,33 | 2,09 | Dry | 2,1 |
| 101100404250270 | 4 | 1 770 | Galvaniserad | sZ | 5,92 | 3,71 | Dry | 3,7 |
| 101100504250270 | 5 | 1 770 | Galvaniserad | sZ | 9,25 | 5,8 | Dry | 5,8 |
| 101100604250270 | 6 | 1 770 | Galvaniserad | sZ | 13,3 | 8,35 | Dry | 8,3 |
| 101100704250270 | 7 | 1 770 | Galvaniserad | sZ | 18,1 | 11,4 | Dry | 11 |
| 101100804250270 | 8 | 1 770 | Galvaniserad | sZ | 23,7 | 14,8 | Dry | 15 |
| 101101004250270 | 10 | 1 770 | Galvaniserad | sZ | 37 | 23,2 | Dry | 23 |
| 101101204250270 | 12 | 1 770 | Galvaniserad | sZ | 53,3 | 33,4 | Dry | 33 |