


Steel wire rope Diepa H43 (SKZ8 P)

Produktinformation

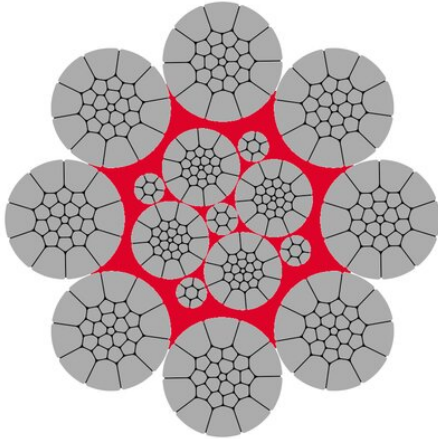

Diepa H43 is a wire rope with compacted inner and outer strands and plastic insert. The rope has a very high breaking force.

Applications: For all different types of cranes where rotation resistant steel wire rope is not required. Lifting wire for mobile cranes, deck cranes and container cranes where multiple parts is being used in lower lifting operations, and where right -and left hand lays are being used in at the same time. Winch and digging machines

Lay: Ordinary lay with internal plastic component.

Total number of wires: 4-6 mm 95, 7-15 mm 262, 16-24 mm 319, 25-44 mm 347, 45-64 mm 427, 65-76 mm 487

ISO 4309 Rope Category No: 4-6 mm **RCN.02**, 7-15 mm **RCN.04**, 16-44 mm **RCN.09**, 45-76 mm **RCN.13**

[... Read more](#)

Märkning: Enligt standard

Standard: EN 12385-4

Fyllnadsfaktor: 0.7403

RCN: 02

Steel wire rope Diepa H43 (SKZ8 P)

Lyfttabell

Art.nr	Lindiameter	Trådhållfasthet N/mm ²	Ytbehandling	Rope lay
103101404900209	14	2 160	Others_Special	sZ