


Lyrschackel 200 klass 3

Produktinformation

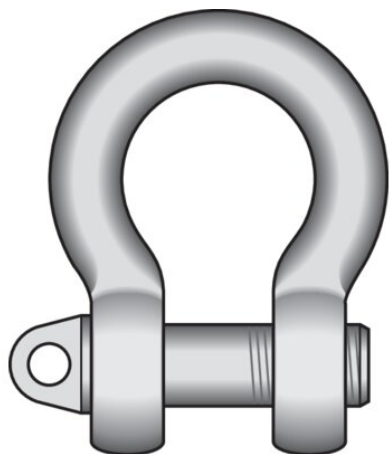

Utförande: Smidd.
Standard: SMS 1619B


... [Read more](#)

Märkning: CE-märkning, Max last.
Ytbehandling: Varmförzinkad.

Säkerhetsfaktor: 5:1

Lyrschackel 200 klass 3

Ritning & mått



Lyfttabell

Art.nr	Max last (WLL) ton	Gänga mm	B mm	D mm	E mm	L mm	Z mm	Vikt kg
420100060450	0,6	M10	15	11	26	34	20	0,13
420100090450	0,9	M12	20	13	35	45	26	0,25
420100150450	1,5	M16	24	16	42	55	33	0,5
420100240450	2,4	M20	28	19	50	65	40	0,83