
Clevis Shackles Pewag KSCHW

Product information

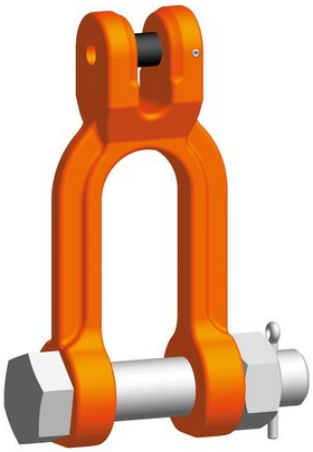

KSCHW Clevis shackles are designed for the assembling of chain slings. They are used as end fittings or suspension elements in chain slings.
Directly attached to the chain. Allows direct connection with other components such as spreader beams.

... *Read more*

Material: High duty grade 10.
Marking: According to standard, CE-mark, Pewag or PW, winner or 10, H16, batch code and type.
Temperature range: -40ºC up to +380°C.
Finish: Orange powder coated.
Standard: EN 1677-1


Safety factor: 4:1
Grade: 10

CERTEX Svenska AB
info@certex.se
08-758 00 10

© November 2026 - All Rights Reserved

Clevis Shackles Pewag KSCHW

Blueprint



Lifting table

Part code	Code	WLL ton	EWL mm	a mm	b min. mm	c mm	d mm	d1 mm	e mm	e1 mm mm	Weight kg
420100190550	KSCHW 7/X	1.9	76	12	26	31	9	16	76	54	0.64
420100250550	KSCHW 8/X	2.5	76	12	26	31	10	16	76	54	0.66
420100400550	KSCHW 10/X	4	105	16	32	39	12	20	105	76	1.22
420100670550	KSCHW 13/X	6.7	113	21	42	50	16	24	113	77	2.64

CERTEX Svenska AB
info@certex.se
08-758 00 10
© November 2026 - All Rights Reserved